


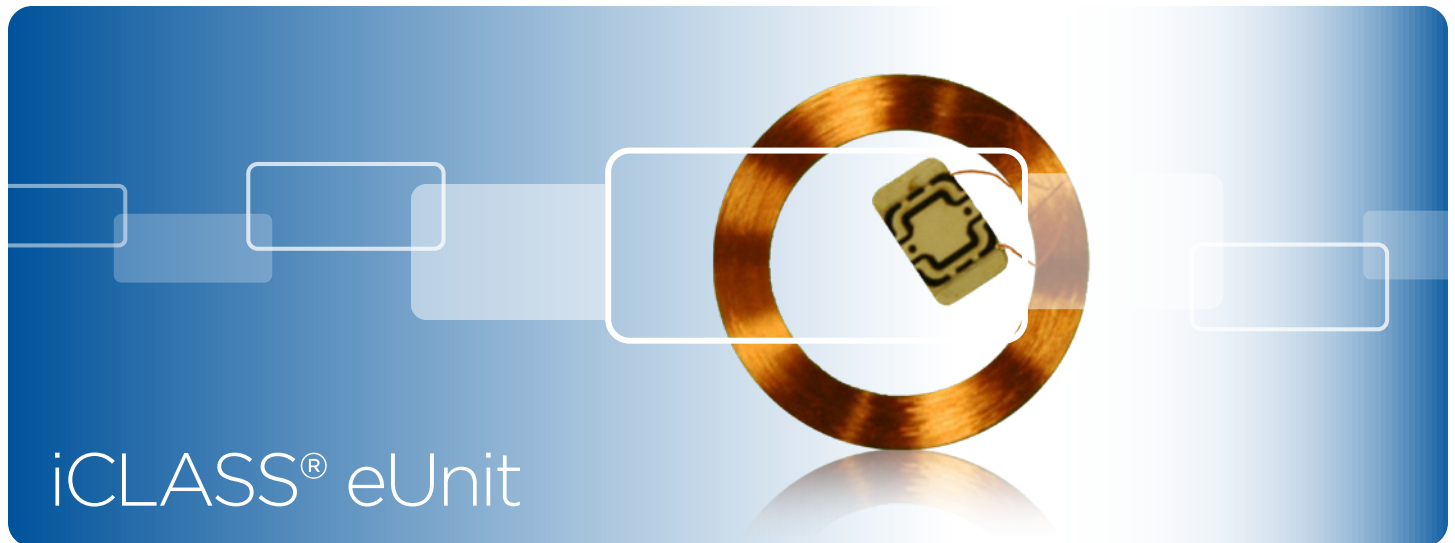

iCLASS® eUnit

ALL 2K BIT (256 BYTE) iCLASS CREDENTIALS HAVE THE FOLLOWING FEATURES:

- Available in two application area configuration only.
- Provides the HID standard access control application area and one other application area for user customization.
- Meet ISO 15693 standard for contactless communications.
- Provides a cost effective way to improve the security of your access control installation.

ALL 16K BIT (2K BYTE) AND 32K BIT (4K BYTE) iCLASS CREDENTIALS HAVE THE FOLLOWING FEATURES:

- Sufficient read/write memory to store multiple biometric templates.
- 16k Available in a two or sixteen application area configuration. 32k available with 16k memory configured in either 2 or 16 application areas, plus an additional 16k user configurable memory.
- Multiple securely separated files enable numerous applications, including the HID standard access control application, and support future growth.
- Meet ISO 15693 for contactless communications.

iCLASS® INSERT 207X • 2070, 2071, 2072

- **13.56 MHz technology** – High speed, reliable communications with high data integrity
- **Convenience and security of iCLASS SE® technology** – Disk-shaped transponder for OEM use
- **Versatile** – Available in 2k bit, 16k bit or 32k bit configurations

HID's iCLASS® 13.56 MHz read/write contactless smart card technology can be used for diverse applications such as access control, biometrics, cashless vending, public transportation, airline ticketing and customer loyalty programs. Multiple, securely separated files enable numerous applications and support future growth.

The iCLASS eUnit provides the convenience of iCLASS technology in a coin-sized, disk-shaped transponder that can be inserted into any nonmetallic card or device to instantly provide 13.56 MHz read/write contactless smart card technology capabilities to utilize as a transition device during the rebadging process

Features:

- 13.56 MHz read/write contactless smart card technology provides high-speed, reliable communications with high data integrity.
- iCLASS SE technology ensures high security with mutual authentication, encrypted data transfer and 64-bit diversified keys for read/write capabilities.
- Any existing HID format can be factory- or field-programmed into the secure HID access control application area.
- Available in 2k bit (256 Byte), 16k bit (2k Byte) or 32k bit (4k Byte) configurations.

* Due to variations in card and reading devices, HID does not claim that the iCLASS eUnit will work in every situation. Functional and nonfunctional iCLASS eUnits are available for compatibility testing with existing credential and reader technologies. Compatibility should be confirmed prior to ordering.

READ/WRITE FUNCTIONALITY FOR MULTI-FUNCTIONAL MEMORY APPLICATIONS

iCLASS® was specifically designed to make access control more powerful, more versatile and more secure. By using industry standard encryption techniques, iCLASS reduces the risk of compromised data or duplicated cards. All radio frequency data transmission between the card and reader is encrypted using a secure algorithm. For even higher security, the tag data may also be protected with DES or triple-DES encryption. Multiple securely separated application areas are each protected by 64-bit diversified read/write keys which allow complex applications and provide for future expansion.

Security mechanisms such as mutual authentication and encryption are efficiently combined with fast processing and data communication, resulting in transaction times of less than 100 milliseconds for a typical secure e-purse transaction.

PROVEN, RELIABLE TECHNOLOGY

Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions.

LONG LIFE

Passive, no-battery design allows for an estimated minimum 100,000 reads.

SPECIFICATIONS

Base Part Numbers		2070 for 2k bit (256 Byte) card with 2 application areas 2071 for 16k bit (2k Byte) card with 2 application areas 2072 for 16k bit (2k Byte) card with 16 application areas 2073 for 32k bit (4k Byte) 16k/2+16k/1 2074 for 32k bit (4k Byte) 16k/16 + 16k/1
Description	13.56 MHz iCLASS eUnit	
Typical Maximum Read Range*	R10 1.0" (2.5 cm) R30/RW300 1.0" (2.5 cm) R40/RW400 1.0" (2.5 cm) RK40/RWK400 1.0" - 1.5" (2.5 cm - 3.8 cm)	
Dimensions	Diameter: 0.749" (19,02mm) Thickness: 0.017" (0,4318mm)	
Weight	0.20 oz. (5.7g)	
Operating Temperature	-40° to 158° F (-40° to 70° C)	
Operating Frequency	13.56 MHz	
RF Interface	As suggested by ISO/IEC: 15693 read/write	
Transaction Time	<100 ms typical	
Baud Rate	15693 mode - 26 kbps	
Memory Type	EEPROM, read/write	
Multi-application Memory	2k bit (256 Byte) card - 2 application areas 16k bit (2k Byte) card - 2 or 16 application areas 32k bit (4k Byte) card - 16k bits in 2 or 16 application areas plus 16k bits user configurable.	
Write Endurance	Min. 100,000 cycles	
Data Retention	10 years	
Warranty	See complete warranty policy for details.	



North America: +1 949 732 2000
Toll Free: 1 800 237 7769
Europe, Middle East, Africa: +49 6123 791 0
Asia Pacific: +852 3160 9800
Latin America: +52 55 5081 1650

hidglobal.com

ASSA ABLOY

An ASSA ABLOY Group brand

© 2019 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design and iCLASS are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. 2019-08-06-pacs-iclass-eunit-en PLT-00127