


ProxCARD® II Card

Durable, Value Priced Proximity Access Card

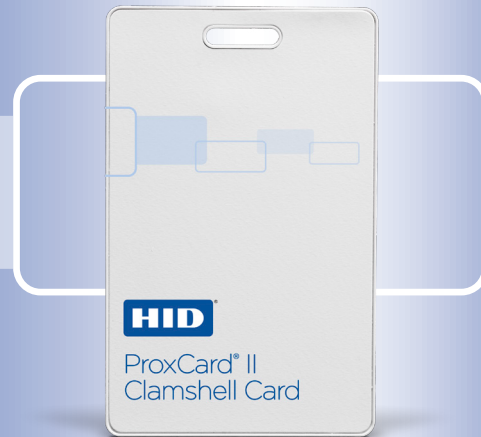

Features:

- Offers universal compatibility with all HID proximity readers.
- Provides durable packaging and consistent read range.
- Provides an external number for easy identification and control.
- Supports formats up to 85 bits, with over 137 billion codes.
- Custom pre-printed artwork available.
- A PVC overlay allows for on-site photo ID using most direct image printers.
- Using HID's ProxProgrammer®, card vendors can ship ProxCARD II proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

THE RF-PROGRAMMABLE PROXCARD® II PROXIMITY ACCESS CARD IS THE INDUSTRY CHOICE FOR A COST-EFFECTIVE SOLUTION TO PROXIMITY ACCESS CONTROL.

- **Proven, Reliable Technology** – Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
- **Convenient To Use** – Can fit into a wallet or purse. Use with a strap and clip as a photo ID badge.
- **Cross-reference** – A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
- **Security** – Offers over 137 billion unique codes.
- **Long Life** – Passive, no-battery design allows for an infinite number of reads.
- **Durability** – Strong, flexible and resistant to cracking and breaking.
- **Companion Products**– 1321 Photo pouch overlay
1324 PVC Direct print overlay

The RF-programmable ProxCARD® II proximity access card is the industry choice for a cost-effective solution to proximity access control.


SPECIFICATIONS

ProxCards® II Card

Base Part Number	1326
Typical Maximum* Read Range	ProxPoint® Plus reader-up to 3" (7.5 cm) MiniProx® reader-up to 5.5" (14 cm) ThinLine® II reader-up to 5.5" (14 cm) ProxPro® reader-up to 8" (20 cm) ProxPro® II reader-up to 9" (22.9 cm) Prox80™-up to 5.5" (14 cm) MaxiProx® reader-up to 24" (60 cm)
Dimensions	2.135" x 3.385" x 0.075" MAX. (5.4 x 8.6 x 0.19 cm)
Operating Temperature	-50° to 160° F (-45° to 70° C)
Options	External card numbering (inkjet only; no laser engraving) Custom artwork (text or graphics)
Weight	0.24 oz. (6.8 gm)
Warranty	Lifetime

NOTES:

*Dependent on local installation conditions.

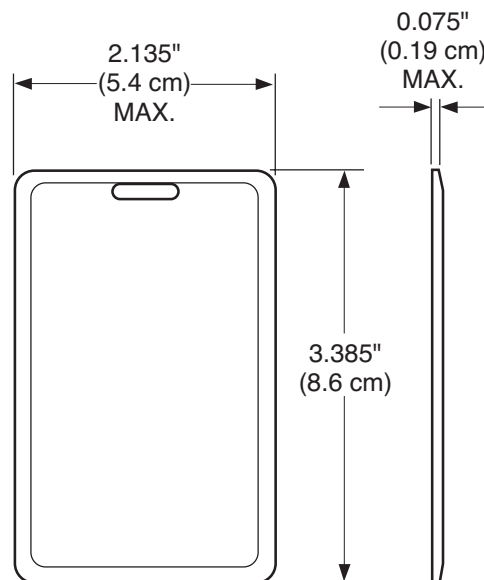

All dimensions are nominal



hidglobal.com

North America: +1 512 776 9000
 Toll Free: 1 800 237 7769
 Europe, Middle East, Africa: +44 1440 714 850
 Asia Pacific: +852 3160 9800
 Latin America: +52 55 5081 1650

© 2013 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design and ProxCards are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.
 2014-07-31-hid-proxcardsii-cards-ds-en PLT-00465

An ASSA ABLOY Group brand

ASSA ABLOY