

Milesight

4K H.265 PoE NVR 5000 Series


NDA A

4K+H.265

PoE



DATASHEET

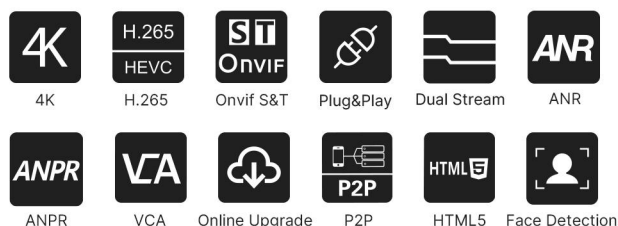


KEY FEATURES

- ▶ NDA A Compliance (The fully NDA A-compliant products are well suited for government, defense and a range of projects subject to the NDA A.)
- ▶ 8/16-CH Input & 8/16*PoE Ports (8/16 channels are supported, and PoE ports design provides just one step to connect.)
- ▶ H.265⁺ (H.265⁺ allows to cut down 70%~80% bandwidth while ensuring the high quality of images compared with H.264.)
- ▶ Dual Stream Recording (Supporting Primary Stream and Secondary Stream recording simultaneously.)
- ▶ HTML5 Streaming Ready (Support previewing the video via all major browsers without plug-in when Video Codec is set to H.265.)
- ▶ Auto Backup (The latest 24 hours' video will be automatically backed up to USB Port Devices or NAS after setting up the backup.)


Power Decoding Capacity & Flexible Storage Options

- The 4K NVR is equipped with solid 4K decoding and display capabilities and maximum support simultaneous viewing of 12*1080P or 16*720P network cameras.
- Providing flexible storage options including HDD and NAS to address the needs for versatile storage.

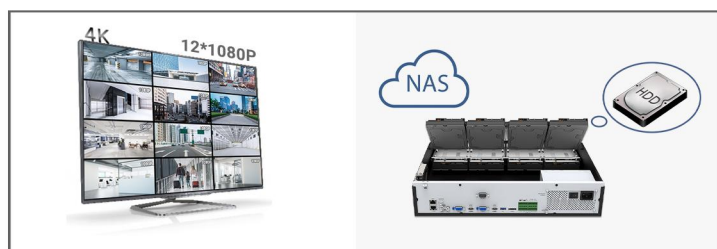


Reliability

- ANR can store video data on the camera storage card when network between IPC and NVR is disconnected and retransfer the recorded video to NVR after network recovers.

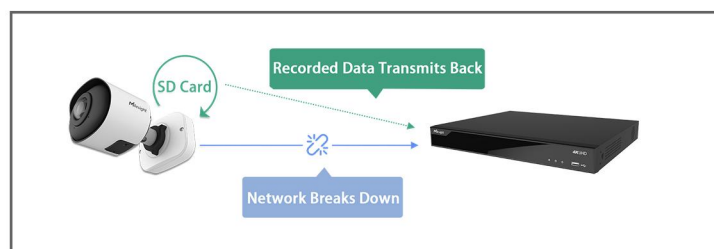


AI Video Analytics & POS Integration

- All-in-one to Manage AI & ANPR:
VCA Function focus on human and vehicle detection.
People Counting provides high-accuracy data and statistic reports.
Face Detection function supports attribute recognition.
Enterprise ANPR Management makes it easy to monitor traffic.
- POS machine information can be transferred to and displayed on the NVR.

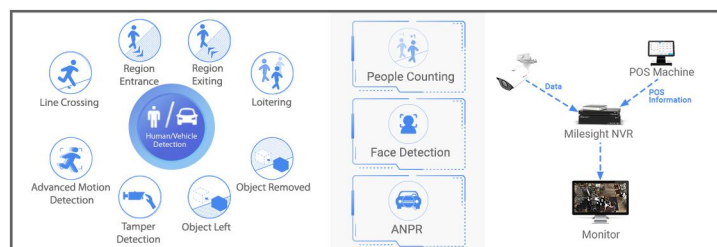

Flexible Structure

- U-Rack Standard supported.
- A whole array of ports provides all necessary features for effective surveillance.

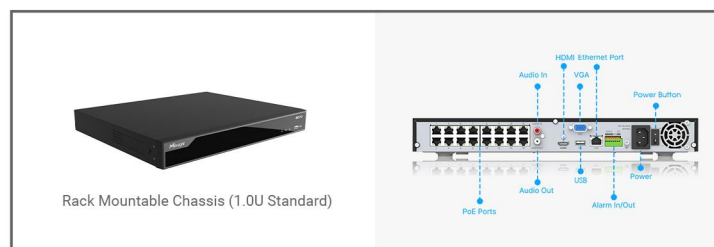



Model			MS-N5008-PE	MS-N5016-NPE
Video/Audio Input	Network Video Input		8-CH	16-CH
	Bandwidth	Incoming	80Mbps	160Mbps
		Outgoing	50Mbps	160Mbps
Video/Audio Output	HDMI Output		1-CH, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output	
	VGA Output		1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	Dual Stream		Support	
	Recording Resolution		8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF	
	Synchronous Playback		1*(30fps @8MP), 2*(30fps @6MP), 2*(30fps @5MP), 3*(30fps @4MP), 4*(30fps @3MP), 6*(30fps @1080P), 8*(30fps @720P)	3*(30fps @8MP), 4*(30fps @6MP), 4*(30fps @5MP), 5*(30fps @4MP), 8*(30fps @3MP), 12*(30fps @1080P), 16*(30fps @720P), 16*(30fps @D1)
Video/Audio Compression	Video Compression		H.265+/H.265(HEVC)/H.264+/H.264	
	Audio Compression		G.711/AAC/G.722/G.726	
	Sample Rate		8KHz/16KHz	
Storage	SATA		2*SATA HDD(3.5")	
	Capacity		Up to 10TB capacity for each HDD	
Recording Management	Recording Type		Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)	
	Snapshot Type		N/A	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)
	Playback Type		General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback	
Backup	Backup		Video Backup, Image Backup	
Network	Protocol		IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS	
External Interface	Network Interface		1*RJ45 10/100/1000Mbps	
	USB Interface		2*USB 2.0	
	Audio Input/Output		1*RCA/1*RCA	
	Alarm Input/Output		4-CH/1-CH	
PoE Interface	Interface		8*RJ45 10/100Mbps	16*RJ45 10/100Mbps
	Power Output		≤200W	
	Supported Standard		IEEE 802.3af/at	
General	Compatibility		ONVIF, API	
	Advanced Function		ANR	
	ANPR		Support	
	Video Analysis		Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed	
	Keyboard Control		Milesight Keyboard (MS-K01)	
	Power Supply		AC 100V~240V 50Hz~60Hz	
	Consumption		≤9W(Without HDD, without enabling PoE)	≤8.5W(Without HDD, without enabling PoE)
	Working Conditions		Temperature: -10℃~55℃ / Humidity: 10%~90%	
	Dimensions		Rack Mountable Chassis (1.0U Standard) 380mm(W)X317.6mm(D)X51.8mm(H)	
	Weight		2.6Kg	2.7Kg
	Warranty		3/5 Years	

4K H.265 PoE NVR 5000 Series




Interfaces


MS-N5008-PE/MS-N5016-NPE



MS-N5008-PE




MS-N5016-NPE

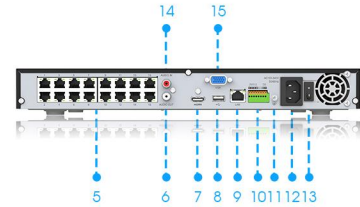

1. Run Indicator 2. HDD Indicator 3. Power Indicator 4. USB 5. PoE Ports 6. Audio Out 7. HDMI 8. USB
9. Ethernet Port 10. Alarm In/Out 11. GND 12. Power 13. Power Button 14. Audio In 15. VGA

Structure Diagrams

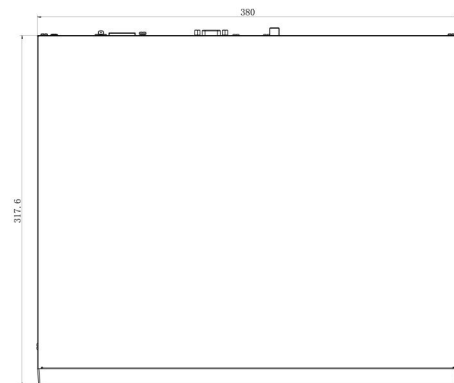

Units: mm

Naming Convention



Mlesight | www.mlesight.com

Contact Us: sales@mlesight.com support@mlesight.com

Add: 220 NE 51st Street, Oakland
Park, Florida 33334, USA
Tel: +1-800-561-0485

Add: 925, Anyang SK V1 Center, LS-ro
116beon-gil, Dongan-gu, Anvang-si, Korea
Tel: +82-31-990-7732

Add: Building C09, Software Park
Phase III, Xiamen 361024, Fujian, China
Tel: +86-592-5922772

