

1300 780 450

High Security

Fabrication
Galvanised RHS


Frame
100 x 100




Dual Bottom Rail
200 x 100



Running Rail
200 x 100

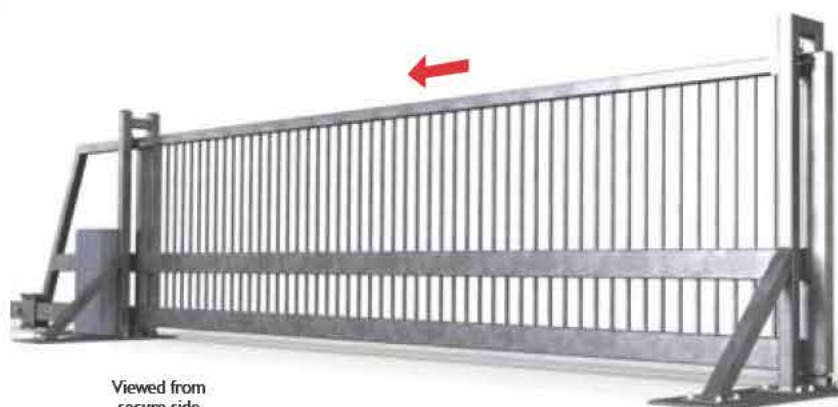

Viewed from
secure side

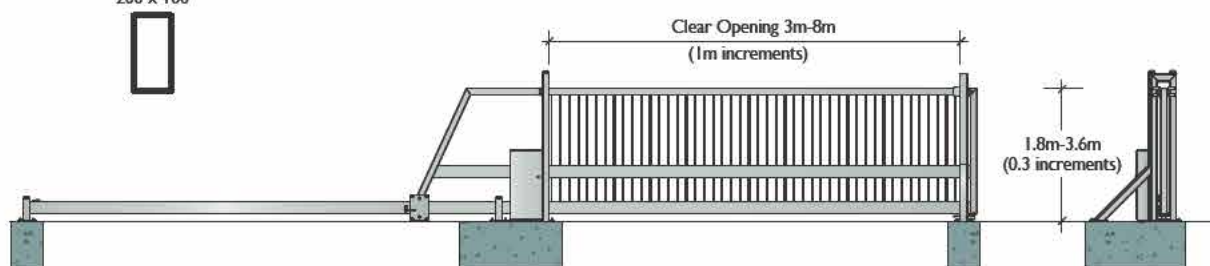

Cantilever High Security	Width Range	Height Range	Gate Infill	Top Extension
CLSH	5.0m-8.0m (1.0m †)	1.8m-3.6m (0.3m †)	Full Range *	Full Range *

† Increments available within width and height range. • Refer p19 for details of Gate Infills and Top Extensions.

Anti-terrorist


CG12

SECURITY
K12
RATED

K12 Certified
by US Department of State.
(Equivalent to ASTM F2656-07 M50.)
Manufactured under licence to
APSG (American Physical Security Group).



Viewed from
secure side

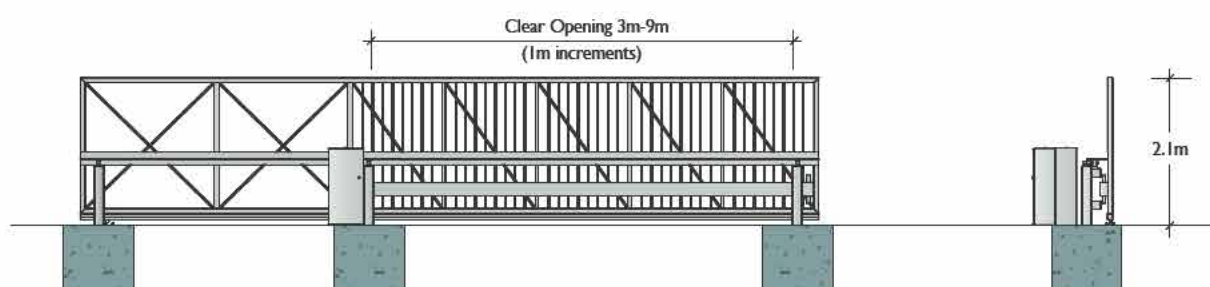

Cantilever Anti-terrorist	Width Range	Height Range	Gate Infill	Top Extension
CG12	3.0m-9.0m (1.0m †)	2.1m only	Full Range *	Full Range *

† Increments available within width range. • Refer p19 for details of Gate Infills and Top Extensions.

Intro	2
Gates	14
Track	20
Cantilever	30
Swing	40
Bi-fold	46
Boom	52
Options	76
General	82
Barriers	94
Blockers	100
Tyre Spikes	102
Pre-cast	106
Other	111
Pedestrian	114
Turnstiles	114
Gates & Doors	136
Fencing	142
Code Index	153