

Slimline 150

Slotted

Material /
Finish

Aluminium 150NB (165.1mm) x 3.00mm aluminium pipe
Electrostatically powder coated in a range of colours

Stainless Steel 150NB (168.3mm) x 3.4 / 7.1mm Grade 304 SS pipe
Finished or electro-polished

Steel 150NB (165.1mm) x 5.40mm galvanised mild steel pipe
Electrostatically powder coated in a range of colours

Fixed Insitu Security Lighting

SSL150F B 7.11 (2/3)

SSL150F C 10.97 (2/3)

1

2


FAL150F2 180°
FAL150F3 360°
SSL150F2 180°
SSL150F3 360°
FS150F2 180°
FS150F3 360°

Aluminium

S/Steel

Steel

FAL150B2 180°
FAL150B3 360°
SSL150B2 180°
SSL150B3 360°
FS150B2 180°
FS150B3 360°

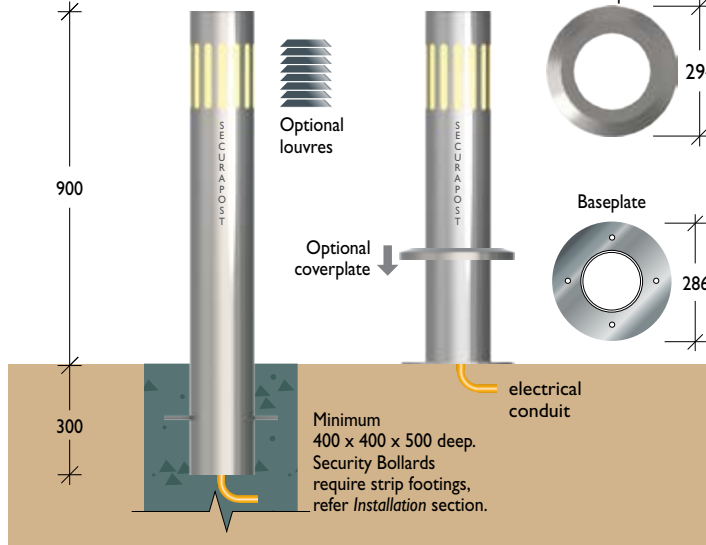


Slotted 26W lamp with louvres

All values in
lux / 1800 lumens

Maximum = 4.82

Height = 1.0m

2.0 (41.5%)
0.7 (14.5%)
0.3 (4.2%)
0.1 (2.9%)

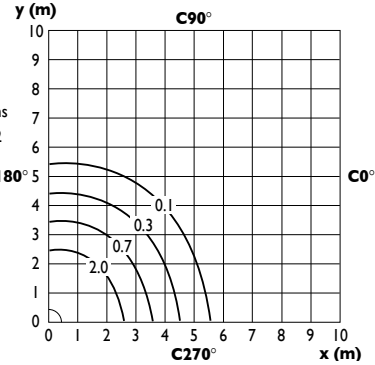


Slotted 26W lamp no louvres

All values in
lux / 1800 lumens

Maximum = 8.78

Height = 1.0m

2.0 (22.8%)
0.7 (8.0%)
0.3 (3.4%)
0.1 (1.6%)

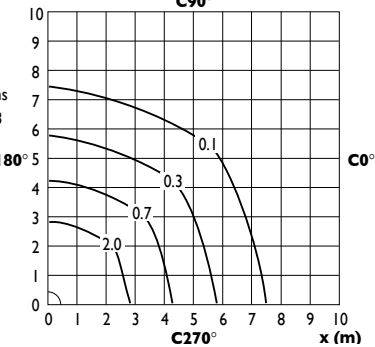

Square

Fixed Insitu Security Lighting

SSL150F B 7.11 (4/5)

SSL150F C 10.97 (4/5)

1

2


FAL150F4 180°
FAL150F5 360°
SSL150F4 180°
SSL150F5 360°
FS150F4 180°
FS150F5 360°

Aluminium

S/Steel

Steel

FAL150B4 180°
FAL150B5 360°
SSL150B4 180°
SSL150B5 360°
FS150B4 180°
FS150B5 360°

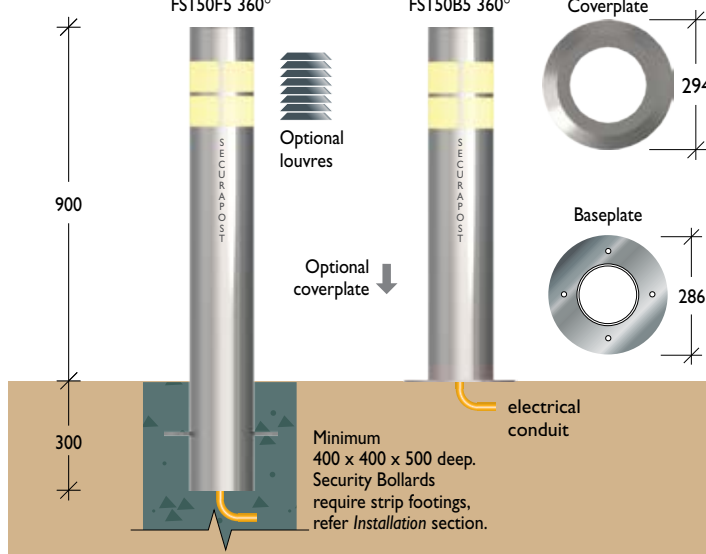


Square 26W lamp with louvres

All values in
lux / 1800 lumens

Maximum = 11.0

Height = 1.0m

2.0 (18.1%)
0.7 (6.3%)
0.3 (2.7%)
0.1 (1.3%)

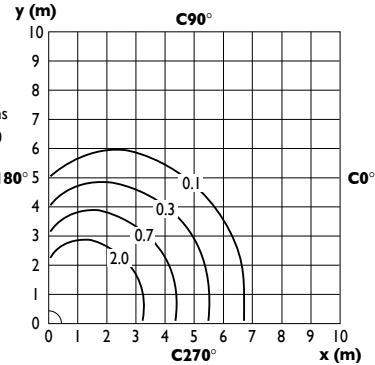

Square 26W lamp no louvres

All values in
lux / 1800 lumens

Maximum = 21.6

Height = 1.0m

2.0 (9.3%)
0.7 (3.2%)
0.3 (1.4%)
0.1 (0.6%)

