

Product Range > Gates > Swing Boom

1300 780 450

Advantage

Fabrication


Boom Frame
75 x 50 RHS





Finish

Galvanised or
powder coated in
a range of colours

Manual swing gates are an economical option for sealing a vehicle area's control point. They are normally padlock-secured to a bollard in the closed position. As this is an option, please specify at time of ordering.

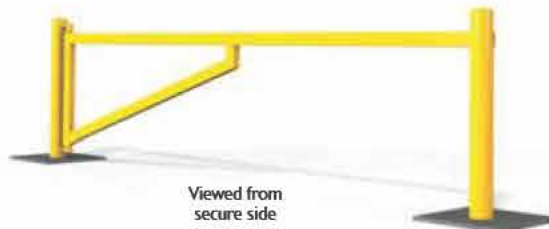


Viewed from
secure side

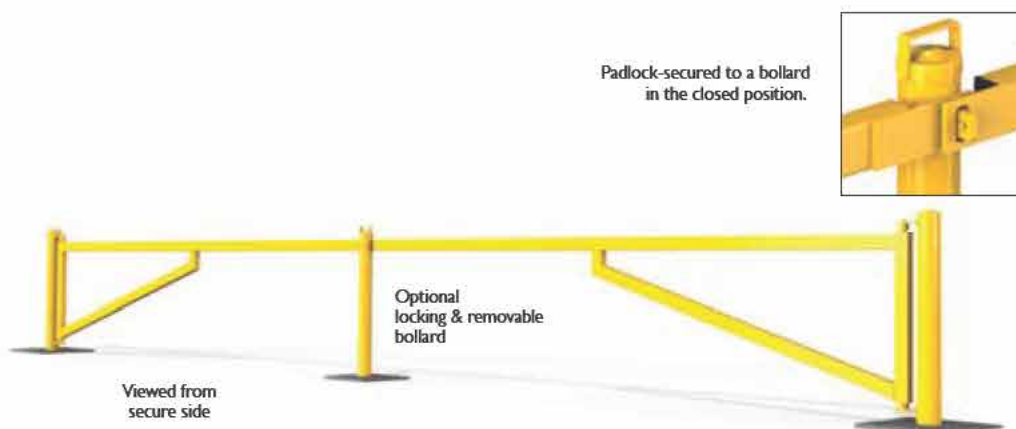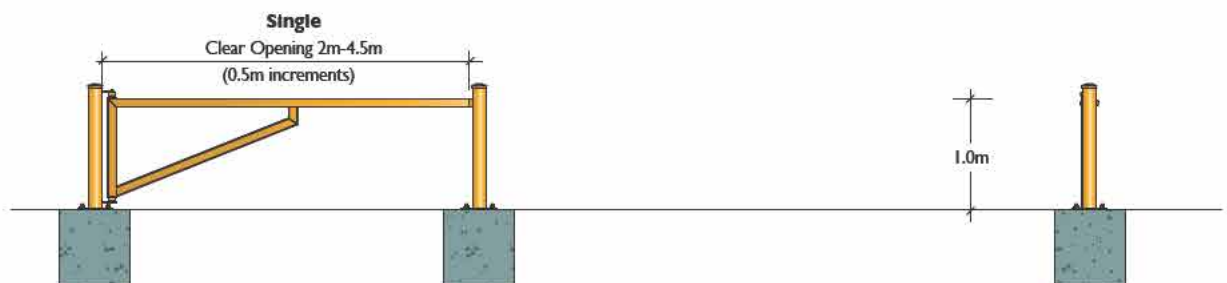

Padlock-secured to a bollard
in the closed position.

Viewed from
secure side

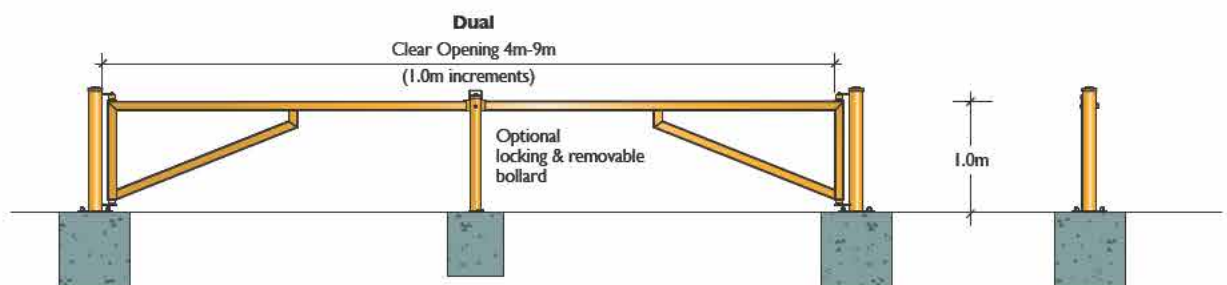

Swinging Boom Advantage		Width Range	Height Range
MSG	Single	2.0m-4.5m (0.5m increments †)	1.0m
DSG	Dual	4.0m-9.0m (1.0m increments †)	1.0m

† Increments available within width range.