

☎ 1300 780 450

Industrial

Fabrication


Boom Frame
40Ø Mild Steel Pipe



Finish

Galvanised or
powder coated in
a range of colours


A marginally heavier and more robust model, they are normally padlock-secured to a bollard in the closed position. As this is an option, please specify at time of ordering.

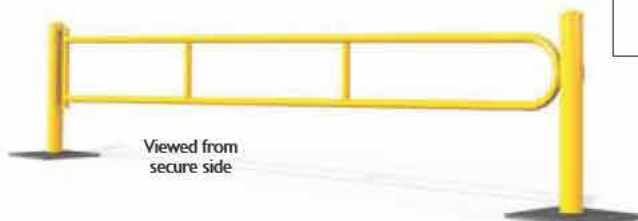

Viewed from
secure side


Single

Clear Opening 2m-6m
(0.5m increments)

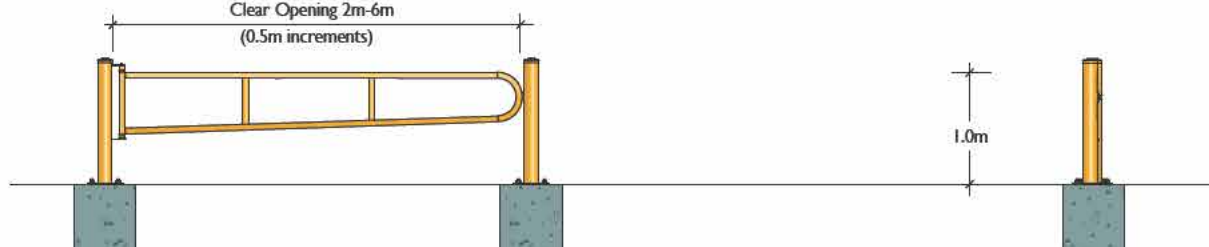

1.0m

Padlock-secured to a bollard
in the closed position.

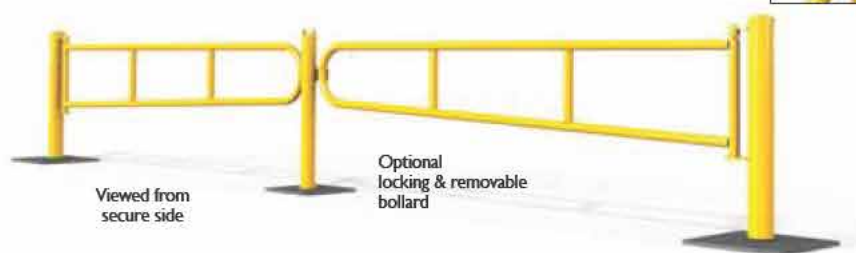


Viewed from
secure side

Optional
locking & removable
bollard

Dual

Clear Opening 4m-12m
(1.0m increments)

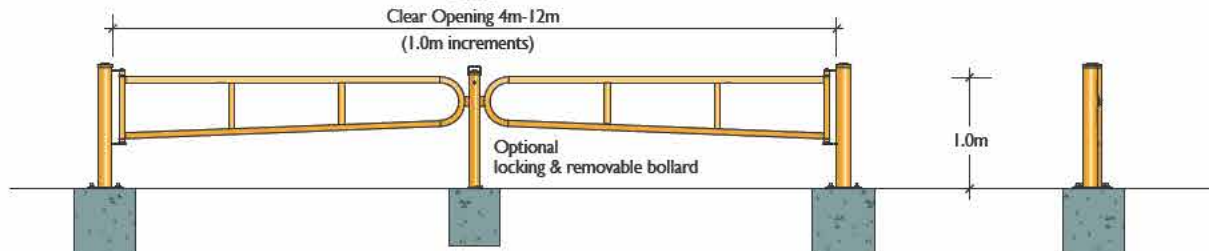

1.0m

Optional
locking & removable
bollard

Swinging Boom Industrial

		Width Range	Height Range
IMSG	Single	2.0m-6.0m (0.5m increments †)	1.0m
IDSG	Dual	4.0m-12.0m (1.0m increments †)	1.0m

† Increments available within width range.

Intro	2
Gates	14
Track	20
Cantilever	30
Swing	40
Bi-fold	46
Boom	52
Options	76
General	82
Barriers	94
Blockers	100
Tyre Spikes	102
Pre-cast	106
Other	111
Pedestrian	114
Turnstiles	114
Gates & Doors	136
Fencing	142
Code Index	153