




IB9360-H

Bullet Network Camera

2MP • SNV • WDR Pro • Smart IR • 30M IR • Smart Stream III • IP66

- H.265 Compression Technology
- 30 fps @ 1920x1080 (WDR Pro on)
- SNV (Supreme Night Visibility) for Low Light Conditions
- WDR Pro for Unparalleled Visibility in Extremely Bright and Dark Environments
- Smart Stream III to Optimize Bandwidth Efficiency
- Built-in IR Illuminators, Effective up to 30 Meters
- Trend Micro IoT Security
- Weather-proof IP66-rated and Vandal-proof IK10-rated Housing
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage





Technical Specifications

System Information

| | |
|-------|---------------------------------|
| Model | IB9360-H |
| CPU | Multimedia SoC (System-on-Chip) |
| Flash | 128 MB |
| RAM | 256 MB |

Camera Features

| | |
|-------------------------------|--|
| Image Sensor | 1/2.9" Progressive CMOS |
| Max. Resolution | 1920x1080 (2MP) |
| Lens Type | Fixed-focal |
| Focal Length | f = 3.6 mm |
| Aperture | F2.0 |
| Iris Type | Fixed iris |
| Field of View | 81° (Horizontal) 44° (Vertical) 95° (Diagonal) |
| Shutter Time | 1/5 sec. to 1/32,000 sec. |
| WDR Technology | WDR Pro |
| Day/Night | Yes |
| Removable IR-cut Filter | Yes |
| IR Illuminators | Built-in IR illuminators, effective up to 30 meters with Smart IR, IR LED*2 |
| Minimum Illumination | 0.065 lux @ F2.0 (Color) <0.005 lux @ F2.0 (B/W) 0 lux with IR illumination on |
| Tilt Range | 90° |
| Rotation Range | 180° |
| Pan/Tilt/Zoom Functionalities | ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in) |
| Storage | Seamless Recording to MicroSD/SDHC/SDXC card and recording to network-attached storage (NAS) |

Video

| | |
|--------------------|--|
| Video Compression | H.265, H.264, MJPEG |
| Maximum Frame Rate | 30 fps @ 1920x1080 |
| Maximum Streams | 3 video streams (Up to 8 configurable profiles) |
| S/N Ratio | 68 dB |
| Dynamic Range | 120 dB |
| Video Streaming | Adjustable resolution, quality and bit rate control, Smart Stream III |
| Image Settings | General settings: video title and time stamp overlay, video orientation (flip, mirror, rotation), day/night settings; Illuminators: illuminators, anti-overexposure; Image settings: white balance, image adjustment (brightness, contrast, saturation, sharpness, gamma curve), defog, 3DNR; Exposure: BLC, HLC, exposure control (exposure level, exposure time, gain control), AE speed adjustment, WDR; Privacy mask; Scheduled profile settings |

Network

| | |
|-----------|--|
| Users | Live viewing for up to 10 clients |
| Security | Access list, digest authentication, HTTPS, IEEE 802.1x, password protection, signed firmware, Trend Micro IoT Security (brute force attack event, cyberattack event, quarantine event), user access log, user account management |
| Protocols | 802.1X, ARP, Bonjour, CIFS/SMB, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMPv3, IPv4, IPv6, NTP, PPPoE, QoS (CoS/DSCP), RTSP/RTP/RTCP, SMTP, SNMP, SSL, TCP/IP, TLS 1.2, UDP, UPnP |
| Interface | 10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard. |
| ONVIF | Profile G, S, T supported, specification available at www.onvif.org |

Solution Integration



| | |
|------------------------|---|
| Video Motion Detection | Five-window video motion detection |
| VADP Package | Stratocast, Trend Micro IoT Security (1-year free trial), VIVOCloud |

Alarm and Event

| | |
|---------------|--|
| Event Trigger | Camera tampering detection, cybersecurity events (brute force attack event, cyberattack event, quarantine event), manual trigger, motion detection, periodical trigger, recording notification, SD card life expectancy, system boot |
| Event Action | Event notification via email, HTTP, FTP, NAS server, SD card, push notification File upload via email, HTTP, FTP, NAS server, SD card |

General


| | |
|-----------------------|---|
| Connectors | RJ-45 cable connector for 10/100Mbps Network/PoE connection |
| Power Input | IEEE 802.3af PoE Class 2 |
| Power Consumption | Max. 6.49 W/3.6 W (IR on/off) |
| Dimensions | Ø 91.1 x 176.8 mm |
| Weight | 530 g |
| Certifications | EMC: CE (EN55032 Class B, EN55024), FCC (FCC Part 15 Subpart B Class B), RCM (AS/NZS CISPR 32 Class B), VCCI (VCCI-CISPR 32 Class B); Safety: UL (UL62368-1), CB (IEC/EN 62368-1, IEC/EN 60950-22, IEC/EN 62471); Environment: IK10 (IEC 62262), IP66 (IEC 60529); IA: BIS (IS 13252) |
| Operating Temperature | Starting Temperature: -10°C ~ 60°C (14°F ~ 140°F) Working Temperature: -30°C ~ 60°C (-22°F ~ 140°F) |
| Humidity | 90% |
| Warranty | 36 months |

System Requirements


| | |
|------------------|---|
| Operating System | Microsoft Windows 10/8/7 Mac 10.12 (Chrome only) |
| Web Browser | Chrome 58.0 or above Internet Explorer 10/11 |
| Other Players | VLC: 1.1.11 or above |

Included Accessories

| | |
|------------------|--|
| Packing Contents | Quick installation guide, alignment sticker, screw pack, cable gland |
|------------------|--|

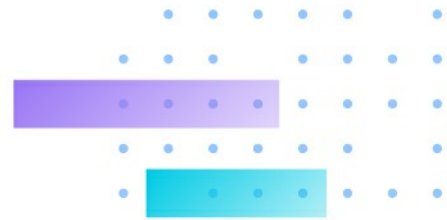

Dimensions

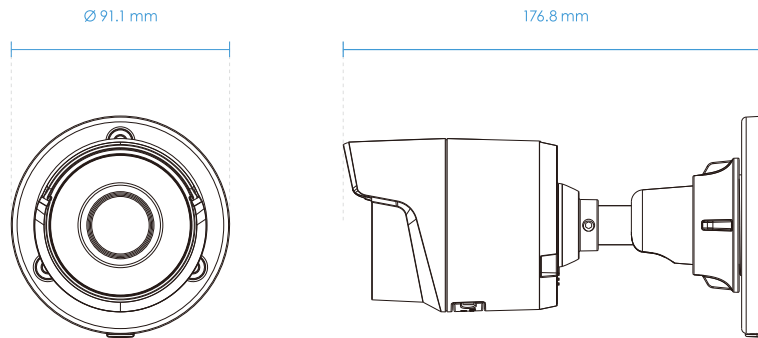

Compatible Accessories

Mounting Kits



AM-312
Pole Mount Adapter

Mounting Kits



AM-412
Corner Mount Adapter

Mounting Kits



AM-523
Adapting Plate

Mounting Kits



AM-71C
Outdoor Junction Box

Mounting Kits



AM-71E
Outdoor Conduit Box